

Tünel Fanı



- Ø560 MM - Ø1600 MM ARALIĞINDA 2300 N'A KADAR
- EN 12101-3 STANDARDINA GÖRE SERTİFİKALI
- İÇİNDEN GEÇEN HAVA KÜTLESİNİN HIZINI ARTIRIR.
- TÜNELDE HAVALANDIRMA İÇİN GEREKLİ HIZI SAĞLAMAYA VE KORUMAYA YARAR.
- JET FANLARI, KANALLI AKSİYEL FANDA OLDUĞU GIBI SİSTEM BASINÇLARINA TABİ DEĞİLDİR.
- JET FAN VERİMLİLİĞİ İTME (N) / KULLANILAN GÜÇ (kW) İLE BELİRLENMEKTEDİR VE BU DEĞER AKSİYEL FAN ÖZELLİKLERİNDE GÖSTERİLEN TOPLAM FAN VERİMLİLİĞİ İLE AYNI DEĞİLDİR.

- BETWEEN Ø560 MM AND Ø1600 , TILL 2300N
- CERTIFIED WITH EN 12101-3 STANDARD
- ACCELERATES THE MASS OF AIR PASSING THROUGH
- PROVIDES NECESSARY SPEED AND BENEFIT FOR PROTECTION TO VENTILATE IN TUNNEL
- JET FANS ARE NOT LIABLE TO SYSTEM PRESSURE AS AXIAL DUCT FAN
- JET FAN EFFICIENCY IS IDENTIFIED WITH NEWTON(N)/ KILOWATT(kW). THIS VALUE IS NOT THE SAME WITH TOTAL FAN EFFICIENCY THAT IS INDICATED IN AXIAL FAN DESCRIPTIONS



sales@cvsair.com.tr




+90(216)417 12 48





1) Cihaz Boyutları

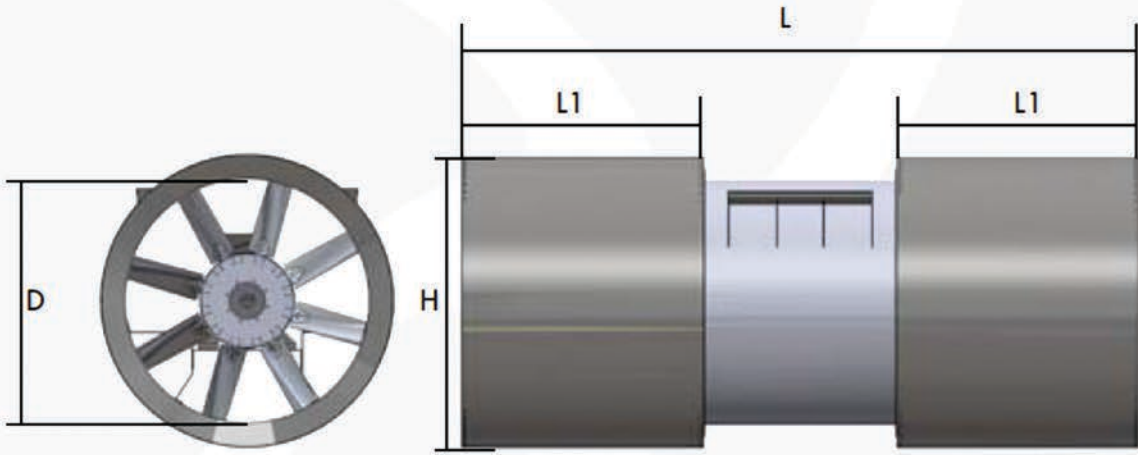

Tip	ØD (mm)	ØH (mm)	L1 (mm)	L (mm)
CVS-TJ R 560	560	760	560	1820
CVS-TJ R 630	630	830	630	1960
CVS-TJ R 710	710	910	710	2120
CVS-TJ R 800	800	1000	800	2450
CVS-TJ R 900	900	1100	900	2900
CVS-TJ R 1000	1000	1200	1000	3100
CVS-TJ R 1120	1120	1320	1120	3140
CVS-TJ R 1250	1250	1450	1250	3550
CVS-TJ R 1400	1400	1600	1400	4200
CVS-TJ R 1600	1600	1800	1600	4700



2) Mekanik Özellikleri

Tip	Fan Çapı (mm)	İtme Gücü (Newton)	Çıkış Hızı (m/s)	Debi (m³/s)	Motor Gücü (kW)	Devir Sayısı (rpm)
CVS-TJ R 560	560	151	22,6	5,6	4	2950
		235	28,2	6,9	5,5	2950
		364	31,2	9,7	11	2950
CVS-TJ R 630	630	475	35,7	11,1	15	2950
		602	40,1	12,5	18,5	2950
		585	35,1	13,9	18,5	2950
CVS-TJ R 710	710	843	42,1	16,7	22	2950
		295	22,1	11,1	7,5	1450
CVS-TJ R 800	800	373	24,9	12,5	11	1450
		441	24,0	15,3	11	1450
CVS-TJ R 900	900	615	28,4	18,1	15	1450
		755	28,3	22,2	18,5	1450
		956	31,9	25,0	30	1450
CVS-TJ R 1000	1000	1180	35,4	27,8	37	1450
		940	28,2	27,8	30	1450
		1138	31,0	30,6	37	1450
CVS-TJ R 1120	1120	1354	33,9	33,3	45	1450
		1276	29,4	36,1	37	1450
		1587	32,8	40,3	45	1450
CVS-TJ R 1250	1250	1814	35,1	43,1	55	1450
		2015	37,0	45,4	75	1450
		1180	25,3	38,9	45	980
CVS-TJ R 1400	1400	1354	27,1	41,7	55	980
		1843	27,7	55,6	75	980
CVS-TJ R 1600	1600	2353	31,2	62,8	90	980



sales@cvssair.com.tr



+90(216)417 12 48

